


# LX5 DIGITAL SIGNAGE PLAYER

Manage and update digital signage in real time from single screens to video walls with one ConnectPlayer Manager.



**Video Walls Made Simple**  
Seamless control for up to 3 screens with one compact device—build your video wall easily and cut time and costs dramatically.

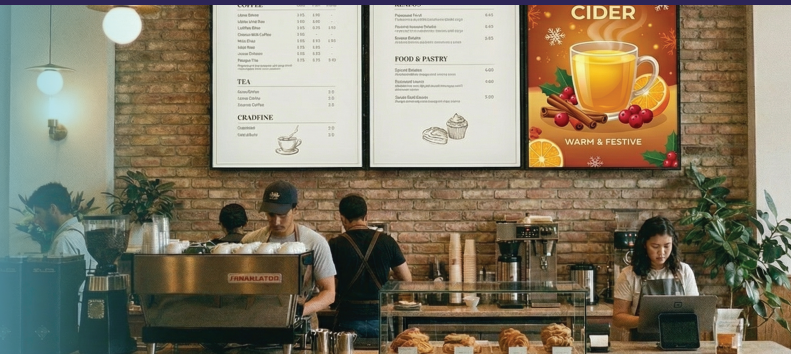


- Superior performance with 8K UHD video playback support
- Supports Office files, PDFs, web pages, videos, audio, and widgets.
- Ultra-compact aluminum design with mounting bracket, easy fit behind your TV
- Launch AI-Enabled Digital Signage Solutions  
Advanced devices with integrated NPUs run AI apps without sacrificing video or audio quality.
- 2-Year Warranty Program  
Complete Hardware Protection + Free Software Updates

## Technical Specifications


	HX5 Digital Signage Player	LX5 Digital Signage Player	SX5 Digital Signage Stick
<b>Device Capability</b>			
Processor (SoC)	Rockchip RK3588	Rockchip RK3588S	Amlogic S905X5M
CPU	Octa-Core (4x A76 + 4x A55)	Octa-Core (4x A76 + 4x A55)	Quad-Core (4x A55, 6nm)
NPU (AI)	6.0 TOPS	6.0 TOPS	Quad-Core (4x A55, 6nm)
Max. Video Resolution	8K UHD	8K UHD	1.0 TOPS
Operating System	Android 12	Android 12	Android 14
Storage	64GB eMMC	32GB eMMC	16GB eMMC
Offline Playback	Supported	Supported	Supported
Video Decoding	H.265(HEVC), H.264(AVC), VP9	H.265(HEVC), H.264(AVC), VP9	H.265(HEVC), H.264(AVC), VP9, AV1
<b>I/O &amp; HW Specs</b>			
HDMI Input	Not Supported	Not Supported	Not Supported
Video Output	4 Outputs - 1 x HDMI Output, up to 8K@60Hz - 1 x HDMI Output, up to 4K@60Hz - 1 x HDMI Output, up to 1080p@60Hz - 1 x USB-C (DP Alt Mode), up to 4K@60Hz	3 Outputs - 1 x HDMI Output, up to 8K@60Hz - 1 x HDMI Output, up to 1080p@60Hz - 1 x HDMI Output, up to 1080p@60Hz	1 x HDMI Output, up to 4K@60Hz
USB	1 x USB 3.0 2 x USB 2.0	1 x USB 3.0 2 x USB 2.0	1 x USB 2.0
Ethernet	Gigabit RJ45	Gigabit RJ45	Supported via USB-to-LAN Adapter
Wi-Fi	Supported via USB 3.0 Adapter (Realtek RTL8812AU/BU)	Supported via USB 3.0 Adapter (Realtek RTL8812AU/BU)	Wi-Fi 2.4GHz/5GHz 802.11a/b/g/n/ac 2T2R
Micro SD Card	For Service Use Only	For Service Use Only	For Service Use Only
Power (DC Adapter)	12V/3A, 5.5 x 2.1 mm	12V/3A, USB Type-C	5V/2A, USB Type-C
Max. Power Consumption	15Watt	10Watt	5Watt
Audio Out	3.5 mm Audio Jack	3.5 mm Audio Jack	Not Supported
Mounting Bracket	Included	Included	Not Included
Operating Temperature Range	-10 °C to +45 °C	-10 °C to +45 °C	-10 °C to +45 °C
Shipping Weight / Device Weight	0.95 kg / 0.38 kg	0.88 kg / 0.31 kg	0.21 kg / 0.07 kg
Enclosure	Aluminum Alloy	Aluminum Alloy	Lightweight Plastic
Product Dimensions (W x D x H)	114.6 x 86 x 31 mm (4.51" x 3.39" x 1.22")	103.6 x 68 x 31 mm (4.08" x 2.68" x 1.24")	205 x 46 x 18.7 mm (8.07" x 1.81" x 0.74")
Package Dimensions (W x D x H)	184 x 134 x 108 mm (7.24" x 5.28" x 4.25")	184 x 134 x 108 mm (7.24" x 5.28" x 4.25")	152 x 108 x 70 mm (5.98" x 4.25" x 2.76")
Certification	FCC, CE, KC	FCC, CE, KC	FCC, CE, KC
<b>Included Services</b>			
2-Year Warranty (Parts & Labor, Free Software Updates)	Included	Included	Included
Complimentary Subscription (1-Year ConnectPlayer Manager)	Included	Included	Included

## I/O Port and Dimensions

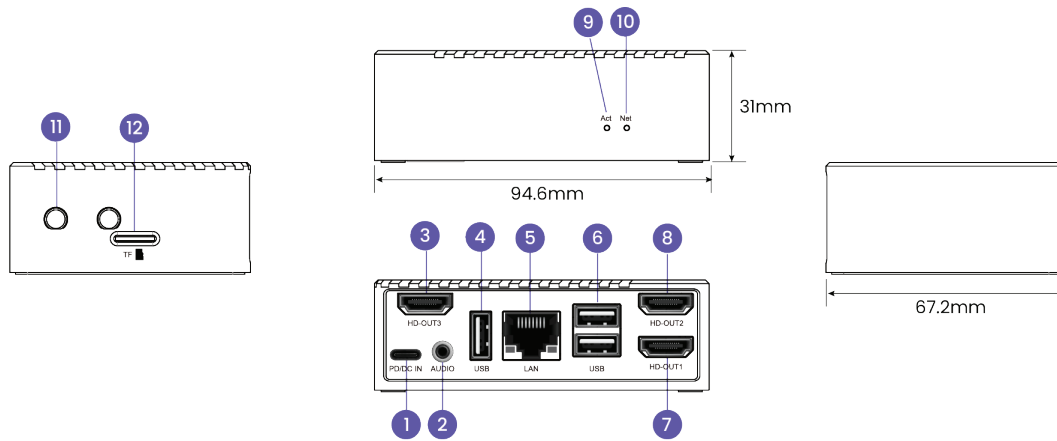

- 1 USB-C(Power) PD/DC-6V~20V
- 2 Audio-out
- 3 HD-OUT3
- 4 USB 2.0
- 5 Ethernet LAN
- 6 USB 2.0 x1, USB 3.0 x1
- 7 HD-OUT1
- 8 HD-OUT2
- 9 Activity LED
- 10 Network LED
- 11 WiFi Antenna (Optional)
- 12 MicroSD (Service Only)

## Bracket Mounting Diagram (Installation Guide)

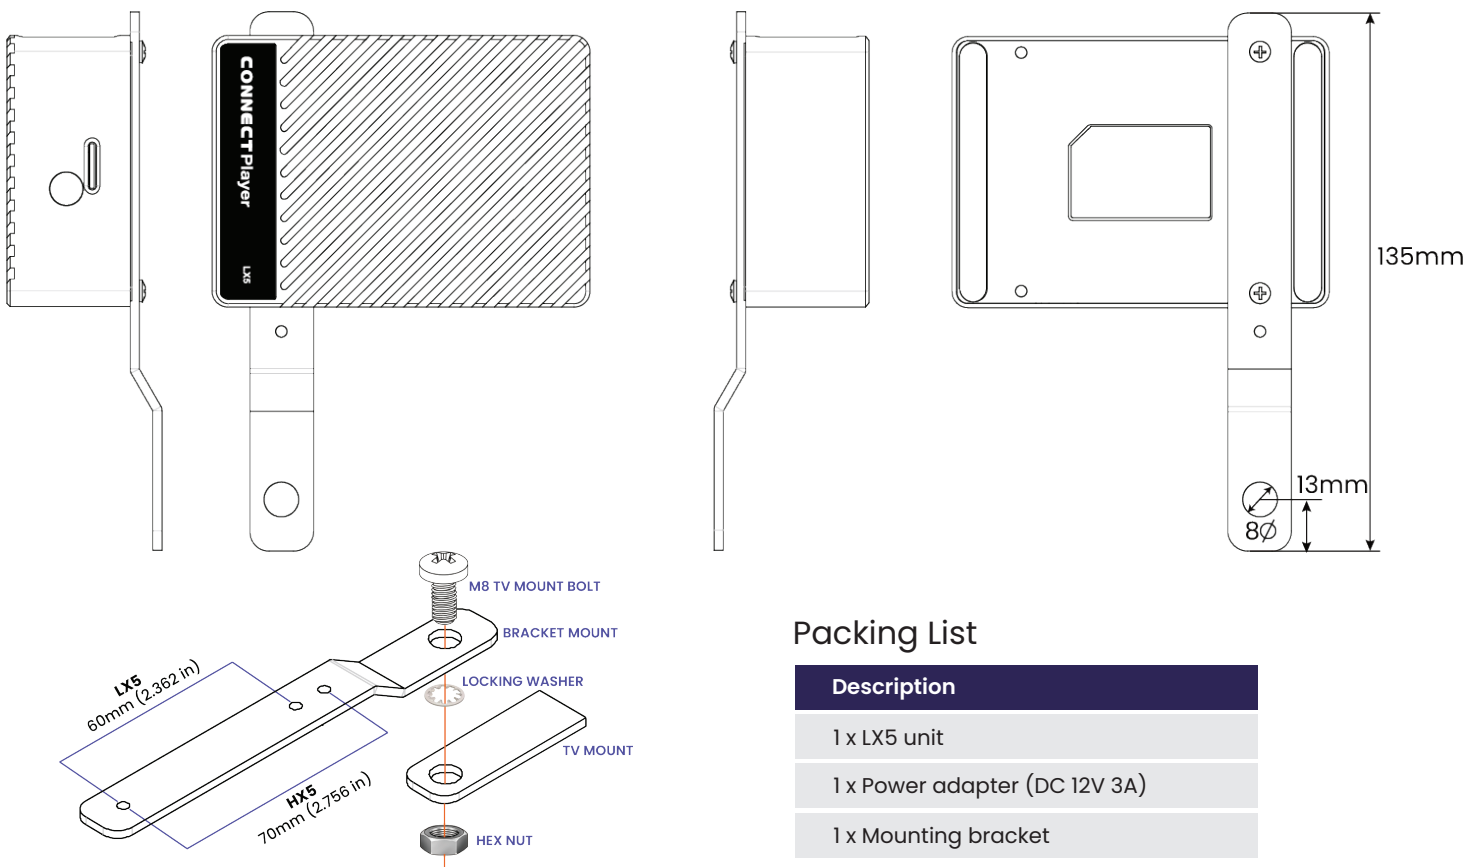

### Packing List

Description
1 x LX5 unit
1 x Power adapter (DC 12V 3A)
1 x Mounting bracket